

www.Lockout-Tagout.co.uk

download the free trial online at nitropdf.com/professional

Better Than Ever

ABLOY® padlocks have been the market leaders for decades. Independent test results have confirmed that **ABLOY®** padlocks continue to operate smoothly after the toughest corrosion tests. They are therefore recommended as the best possible choice for unprotected use in severe conditions. Durable materials such as hardened boron steel provide effective protection against drilling, sawing, cutting, twisting or shimming.

ABLOY[®] PL362 is the strongest padlock on the market. It is a product that has passed the most demanding Scandinavian break-in tests and is classed as Scandinavian Grade 5, the highest grade. The unique locking construction makes it extremely difficult to attack.

All grades of **ABLOY**[®] padlocks employ similar technical solutions to provide superior performance in a wide range of security applications.





ABLOY[®] padlocks offer a selection of different key systems, key profiles and key security levels.



ABLOY®- Unique features and benefits

Excellent resistance against physical attack

The hardened steel housings and hardened boron steel shackles in **ABLOY**[®] padlocks provide maximum resistance against physical attack.

The hardened, free-spinning protection plate prevents drill bits from penetrating the lock. Further security is provided by hardened stainless ball bearings locking the shackle at both ends.

The highest security can be provided by non-rekeyable construction.

The unique cylinder mechanism offers superior masterkeying features

The unique **ABLOY**[®] rotating detainer disc cylinder mechanism offers extensive masterkeying possibilities due to the several million different key combinations available. All **ABLOY**[®] cylinder products from door locks, camlocks and furniture locks to padlocks can be made to operate with just one key.

A model for every purpose

The selection of body sizes, shackle diameters and materials in the **ABLOY**[®] padlock range means that it is easy to choose exactly the right product for each application.



Maximum resistance against corrosion

The unique surface treatments used by **ABLOY**[®] guarantee that the corrosion resistance of both the visible parts of each lock and the internal parts is at the highest possible level. **ABLOY**[®] padlocks are recommended as the best products for the naval environments and coastal locations.

Reliable function in all conditions

ABLOY[®] padlocks are widely used by governments, utility and national transportation organisations as all the component parts are highly-resistant to wear, dirt, moisture, corrosion and freezing.

ABLOY[®] padlocks do not contain springs or parts which could jam.



download the free trial online at nitrop



ABLOY® PADLOCKS - for applications that demand perfection

Decades of experience set by our clients' requirements within various applications, have resulted in today's extensive range of ABLOY® padlocks. Our range of security solutions continue to offer a level of performance and protection which remains unsurpassed.





PL362


STEEL PADLOCK WITH RAISED SHOULDERS

Grade 6



For applications where maximum security is required. Case-hardened steel body with raised shoulders and a toploaded cylinder provide the highest level of security and protection. Applications include containers, train wagons, trucks, lorries, heavy sliding doors, military applications etc.

PL362 is equipped with a case hardened boron steel shackle, diameter 15 mm.

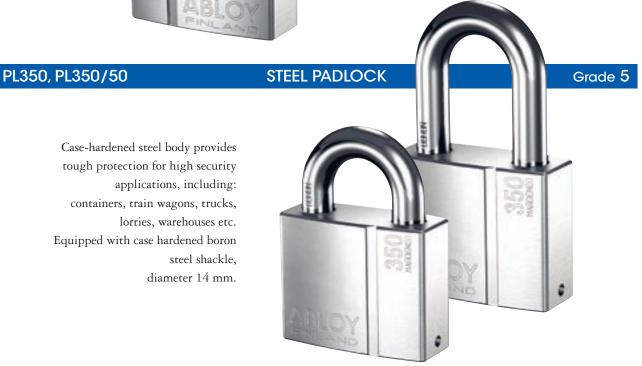

PL342

STEEL PADLOCK WITH RAISED SHOULDERS

Grade 4



By extending the case-hardened steel body to surround the shackle we have made this padlock virtually impregnable against attack by cutting and prying tools. Suitable for heavy sliding doors, train wagons, trucks, warehouses etc. PL342 is equipped with case hardened boron steel shackle, diameter 10 mm.

Created with



download the free trial online at nitropdf.com/professional



PL340, PL340/50

Extra-strong padlocks for applications where high security is required. Ideal for construction equipment, tractor trailers and remote storage areas, trucks, storage bins, roller-shutter doors, motorcycles and warehouses. The case-hardened steel body is highly resistant to all types of physical attack. Equipped with hardened boron steel shackle, diameter 10 mm.



BRASS PADLOCK

Grade 3

A strong padlock for storage doors, gates and windows as well as trailers, protective bars, storage lockers, boats, rollershutter doors etc. Equipped with hardened boron steel shackle, diameter 10 mm.

PL330, PL330/50 Grade 3

BRASS PADLOCK

An all-purpose padlock of durable construction for storage doors, motorcycles, gates, trailers, power station switches etc. Equipped with hardened boron steel shackle, diameter 8 mm. Also available with non-sparking brass or stainless steel shackle (security grading not tested).



Lockout-Tagout.co.uk

download the free trial online at nitropdf.com/profess

PL321/20, PL321/50



BRASS PADLOCK

An all-purpose padlock of durable construction for storage doors, gates, trailers, power station switches etc. Equipped with stainless steel shackle, diameter 5 mm.

PL320/20 Grade 2

BRASS PADLOCK

A multi-purpose padlock ideal for cash boxes, tool boxes, storage cabins, light machinery and lockers.



3020 Grade 2

BRASS PADLOCK

This general purpose padlock has a die-cast, compact brass body and is furnished with raised shoulders which provide added strength and shackle clearance. A cost-effective product for securing boats, bicycles, power station switches, tool boxes and storage sheds. Shackle diameter 7 mm.





DIE-CASTED ZINC PADLOCK

A multi-purpose padlock with 6,5 mm chrome plated steel shackle and diecasted lock body with coloured plastic cover. The options of colour for plastic cover are dark blue/light blue, green/violet and yellow/black. Cost effective product preferably for indoor use eg. cabinets and tool boxes.



PL320/50

ABLOY® Padlocks

М	ODEL		BC						
	NUMBER	GRADE	MATERIAL	FINISH	MATERIAL	FINISH			
	PL362	6	СНЅ	chrome	CHBS	chrome			
	PL350 PL350/50	5 5	CHS	chrome	CHBS	chrome			
	PL342	4	СНЅ	chrome	CHBS	chrome			
	PL340 PL340/50 PL341 PL341/50	4 4 3 3	CHS brass	chrome	CHBS	chrome			
	PL330 PL330/50 PL330/100	3 3 *)	brass	chrome	CHBS (brass, stainless steel*)	chrome			
→	PL321/20 PL321/50 PL320/20 PL320/50	*) *) 2 *)	brass chrome		stainless steel	chrome			
	3020 3021	2 *)	brass	brass	CHS	chrome			
	PL318	*)	die-casted zinc with plastic cover		steel	chrome			
*) = not tested CHS = case-hardened steel with CHBS = case-hardened boron steel									
nitro ^{PDF} professional									

Lockout-Tagout.co.uk

download the free trial online at nitropdf.co

nal

TAGOUT SAFETY (TO

- Technical details

SHACKLE			KEYING				CYLINDER OPTIONS						
mm		mm	inches	mm	inches	NUMBER OF DISCS	REKEY- ABLE	NON REKEY- BLE	KEY R	EMOVABLE BOTH IN LOCKED AND UNLOCKED	ABLOY® CLASSIC KEY	ABLOY® EXEC KEY	ABLOY® PROTEC KEY
15	19/32		63/64	30	1 11/64	11	•	•	•	POSITION	•	•	•
14 14	35/64 35/64	25 50	63/64 1 31/32	31 31	1 7/32 1 7/32	11 11	•	•	•		•	•	•
10	25/64	25	63/64	25	63/64	11	•	•	•		•	•	•
10 10 10 10	25/64 25/64 25/64 25/64	25 50 25 50	63/64 1 31/32 63/64 1 31/32	28 28 28 28 28	1 3/32 1 3/32 1 3/32 1 3/32 1 3/32	11 11 11 11	•	•	•			•	•
8 8 8	5/16 5/16 5/16		63/64 1 31/32 3 30/32	25 25 25	63/64 63/64 63/64	11 11 11	•	•	•		•	•	•
5 5 5 5	13/64 13/64 13/64 13/64	20 50 20 50	15/32 1 31/32 15/32 1 31/32	18 18 18 18	45/64 45/64 45/64 45/64	11 11 9 9		•	•		•	•	•
7 7	9/32 9/32	35 76	1 3/8 3	26 33	1 1/32 1 5/16	11 11		•		•	:		
6,5	8/32	20	25/32	21	1/2	9		•		•	•		

Created with

nitro

download the free trial online at nit water free trial on the f

LOCKING PLATES



PL200, PL202

- 12 mm shackle hole
- Grade 3
- PL200 for right-handed doors
- PL202 for left-handed doors
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- · Fixing screws included

ABL

Œ

Ð



PL201, PL203

- 18 mm shackle hole
- Grade 4

20

±1

- PL201 for right-handed doors
- PL203 for left-handed doors
- For frame fixing

201

ABLC

Ŧ


- Zinc-plated, polyester-coated case-hardened steel
- · Fixing screws included



PL200, PL202, PL201, PL203, PL204

PL204

- 12 mm shackle hole
- Non-handed
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- Fixing screws included



CHAINS 805349, 805351

COVERS

 \oplus

11

802897, 805649, 802858, 808248

Different plastic covers are available to provide additional protection against dust and impact. 802897 and 808248 to suit PL330 805649 to suit PL340 and PL341 802858 to suit PL350





805649 808248



Attachment chain (length 220 mm) makes it easier to ensure that a padlock does not get mislaid while the object that it secures is open. These chains must not be used as part of a security installation.

Chains are available in two sizes, 805349 for a 8 mm shackle and 805351 for a 10 mm shackle. 810270 for a 14 mm shackle.

download the free trial online at nit

professional

ABLOY[®] padlocks have been designed and manufactured to not only meet the requirements of the EN12320 padlock stan-dard, but exceed as the requirements of our own tests are significantly higher. ABLOY[®] padlocks continued to operate smoothly throughout exhaustive

durability tests such as the acetic acid salt-spray test – they are therefore the best possible alternative for use in unprotected locations where the environmental conditions are severe.

Abloy Oy has paid particular attention in design of environmetally-friendly production methods.

As a result we use the most modern and environmentally-friendly surface plating facility in Finland.

All the operations are qualified with the ISO9001 and ISO14001 certifications.

SECURITY GRADES ACCORDING TO THE EN12320 PADLOCK STANDARD										
Requirements	1	2	3	4	5	6				
Minimum number of differs	300	1 000	2 500	5 000	10 000	20 000				
Pulling of shackle/staple	3	5	15	30	70	100	kN			
Twisting of shackle/staple	40	100	200	450	1 200	2 500	Nm			
Cutting of shackle/staple	6	15	25	35	70	100	kN			
Blow on shackle/staple (weight/g x height/mm) Test temperature			1 250 x 800 -20°C	3 050 x 1 000 -20°C	6 550 x 1 400 -40°C	7 150 x 1 500 -40°C	x5 times			
Blow on lock body (weight/g x height/mm) Test temperature			1 250 x 800 -20°C	3 050 x 1 000 -20°C	6 550 x 1 400 -40°C	7 150 x 1 500 -40°C	x5 times			
Load on cylinder plug or locking mechanism			4	5	10	15	kN			
Drilling				2	4	8	min			
Sawing				2	4	8	min			
Torque resistance of cylinder plug			5	15	20	30	Nm			

DO-IT-YOURSELF PACKS

The following models of padlock are available in Do-it-Yourself packs

PL350, PL350/50 PL342 PL341, PL341/50 PL340, PL340/50 PL330, PL330/50 PL320, PL320/50, 3 x PL320 3020, 3021 3022 (2 x 3020) PL200, PL202, PL204

Cylinder Types

- С **ABLOY®** CLASSIC
- Е **ABLOY® EXEC**

ABLOY® PROTEC Type of Assembly

- KD **KEYED-DIFFERENTLY**
- KA **KEYED-ALIKE**

Ν

UΔ

MK MASTER-KEYED

UNASSEMBLED

WHEN ORDERING


- When ordering, please specify:
- Product code (e.g. PL341C)
- Height of the shackle (20, 25, 50, 100 mm)
- Cylinder type (C, E, N)
- Quantity
- Key profile
- Rekeyable/ non-rekeyable
- Type of assembly (KD, KA, MK, UA)
- Keying (in KA and MK systems)
- Disc specification (in UA deliveries)

download the free trial online at nitrop

• Chain (if needed)

Created with


ABLOY® - the sign for security



The quality and environmental systems used by Abloy Oy guarantee that customers can be certain of $ABLOY^{\oplus}$ quality in every field. We received our first Quality System Certificate - SFS-EN ISO 9001 - in 1989. Just eight years later, Abloy Oy was one of the first companies in Finland to be granted an SFS-EN-ISO 14001 Environmental System Certificate.

Our products are designed and manufactured not only to provide high levels of security, but also to be reliable, userfriendly and aesthetically pleasing.

ABLOY[®] is your sign for security.

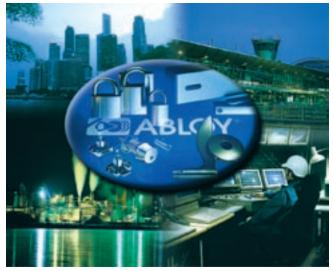

 $\label{eq:absolution} \begin{array}{l} \textbf{ABLOY}^{\circledast} \text{ is a registered trademark of Abloy Oy, one of the leading manufacturers of locks, locking systems and architectural hardware and the world's leading developer of products in the field of electromechanical lock technology. \end{array}$

The unique **ABLOY**[®] detainer disc cylinder mechanism has several advantages over conventional locking mechanisms. Ever since its invention in 1907, it has been a symbol of high security and superior performance.

Our range consists of electromechanical locks, cam locks, padlocks, office furniture locks, rim locks, lock cases, cylinders for different types of mortice locks, door closers, door automatics and architectural hardware. **ABLOY®** locking solutions for every application are available from our world-wide network of distributors.

Customer-oriented development, combined with our long experience and extensive security expertise, mean that $\mathsf{ABLOY}^{\circledast}$ security solutions employ the very latest technology to meet your needs.



www.abloy.com



ISO RIOT ISO 14401 OHSAS TROOT DINTU CENTIFIED ORGANISATION

ASSAABIO

An ASSA ABLOY Group brand

Abloy Oy is one of the leading manufacturers of locks, locking systems and architectural hardware and the world's reading developer of products in the field of electromechanical locking technology.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.